



FCC TEST REPORT

**Test report
On Behalf of
SLon Technology Co., Limited
For
RFID Reader**

**Model No.: SR360, SR2, AR180, AR980, SR160, SR180, SR200,
SR300, SR681, SR781, SI801, SI861, SR891**

FCC ID: 2A6NQ-SR360

Prepared For : SLon Technology Co., Limited

**Room 1003, 10/F, Weida Commercial Building, 1A-1L, Tung Choi Street, Mong
Kok, Kowloon, Hongkong**

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.

**1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China**

Date of Test: Mar. 07, 2022~Apr. 25, 2022

Date of Report: Apr. 25, 2022

Report Number: HK2203070912-E



TEST RESULT CERTIFICATION

Applicant's name : SLon Technology Co., Limited
 Address : Room 1003, 10/F, Weida Commercial Building, 1A-1L, Tung Choi Street, Mong Kok, Kowloon, Hongkong
Manufacturer's Name : Yanzeo Smart Co Ltd
 Address : Room 1701, No. 8 Minsheng Street, Huangpu District, Guangzhou, China

Product description

Trade Mark: YANZEO
 Product name : RFID Reader
 Model and/or type reference : SR360, SR2, AR180, AR980, SR160, SR180, SR200, SR300, SR681, SR781, SI801, SI861, SR891
 Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.249
 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :
 Date (s) of performance of tests : Mar. 07, 2022~Apr. 25, 2022
 Date of Issue : Apr. 25, 2022
 Test Result : **Pass**

Testing Engineer : *Gary Qian*

 (Gary Qian)

Technical Manager : *Zden Hu*

 (Eden Hu)

Authorized Signatory : *Jason Zhou*

 (Jason Zhou)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Table of Contents

Page

1 . TEST SUMMARY	6
1.1 . Test Procedures and Results	6
1.2 . Information of the Test Laboratory	6
1.3 . Measurement Uncertainty	6
2 . GENERAL INFORMATION	7
2.1 . General Description of EUT	7
2.2. Carrier Frequency of Channels	8
2.3. Operation of EUT During Testing	8
2.4. Description of Test Setup	8
2.5. Measurement Instruments List	9
3 . CONDUCTED EMISSIONS TEST	10
3.1. Conducted Power Line Emission Limit	10
3.2. Test Setup	10
3.3. Test Procedure	10
3.4. Test Result	11
4 FIELD STRENGTH OF FUNDAMENTAL	13
4.1. Limit	13
4.2. Test Procedure	13
4.3. Test Result	14
5. RADIATED EMISSION TEST	15
5.1. Radiation Limit	15
5.2. Test Setup	15
5.3. Test Procedure	16
5.4. Test Result	16
6. BAND EDGE	22
6.1. Limits	22
6.2. Test Procedure	22
6.3. Test Result	23
7. OCCUPIED BANDWIDTH MEASUREMENT	25
7.1. Test Setup	25
7.2. Test Procedure	25
7.3. Measurement Equipment Used	25
7.4. Test Result	25
8. ANTENNA REQUIREMENT	27
9. PHOTOGRAPH OF TEST	28

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Table of Contents

Page

10. PHOTOS OF THE EUT

30



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Apr. 25, 2022	Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Address: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



1. TEST SUMMARY

1.1. Test Procedures and Results

DESCRIPTION OF TEST	SECTION NUMBER	RESULT
CONDUCTED EMISSIONS TEST	15.207	COMPLIANT
RADIATED EMISSION TEST	15.249(a)/15.209	COMPLIANT
BAND EDGE	15.249(d)/15.205	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	15.215 (c)	COMPLIANT
ANTENNA REQUIREMENT	15.203	COMPLIANT
FIELD STRENGTH OF FUNDAMENTAL	15.249(a)	COMPLIANT

1.2. Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street,
 Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
 FCC Designation Number is CN1229.
 Canada IC CAB identifier is CN0045.
 CNAS Registration Number is L9589.

1.3. Measurement Uncertainty

Measurement Uncertainty

- Conducted Emission Expanded Uncertainty = 2.71dB, k=2
- Radiated emission expanded uncertainty(9kHz-30MHz) = 3.90dB, k=2
- Radiated emission expanded uncertainty(30MHz-1000MHz) = 3.90dB, k=2
- Radiated emission expanded uncertainty(Above 1GHz) = 4.28dB, k=2



2. GENERAL INFORMATION

2.1. General Description of EUT

Equipment:	RFID Reader
Model Name:	SR360
Series Model:	SR2, AR180, AR980, SR160, SR180, SR200, SR300, SR681, SR781, SI801, SI861, SR891
Model Difference:	All model's the function, software and electric circuit are the same, only with a product color, appearance and model named different. Test sample model: SR360.
FCC ID:	2A6NQ-SR360
Antenna Type:	Internal Antenna
Antenna Gain:	1.5dBi
Operation frequency:	902.6-927.4MHz
Number of Channels:	27CH
Modulation Type:	GFSK
Power Source:	DC 5V from USB
Power Rating:	DC 5V from USB



2.2. Carrier Frequency of Channels

Description of Channel:					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.6	10	911	19	920
2	903	11	912	20	921
3	904	12	913	21	922
4	905	13	914	22	923
5	906	14	915	23	924
6	907	15	916	24	925
7	908	16	917	25	926
8	909	17	918	26	927
9	910	18	919	27	927.4

2.3. Operation of EUT During Testing

Operating Mode

The mode is used: **Transmitting mode**


Low Channel: 902.6MHz

Middle Channel: 915MHz

High Channel: 927.4MHz

2.4. Description of Test Setup

Operation of EUT during testing:



PC information

Model: ThinkPad X220i

Input: 20V, 3.25A/4.5A

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.

**2.5. Measurement Instruments List**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Feb. 18, 2022	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Feb. 18, 2022	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 18, 2022	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Feb. 18, 2022	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 18, 2022	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Feb. 18, 2022	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Feb. 18, 2022	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Feb. 18, 2022	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Feb. 18, 2022	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 18, 2022	1 Year
11.	Pre-amplifier	EMCI	EMC051845S E	HKE-015	Feb. 18, 2022	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Feb. 18, 2022	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JY3120-B Version	HKE-083	N/A	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Feb. 18, 2022	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 18, 2022	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Feb. 18, 2022	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Feb. 18, 2022	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 09, 2021	3 Year
19.	Hight gain antenna	Schwarzbeck	LB-180400KF	HKE-054	Feb. 18, 2022	1 Year

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3. CONDUCTED EMISSIONS TEST

3.1. Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following.

Frequency (MHz)	Maximum RF Line Voltage (dBµV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2. Test Setup

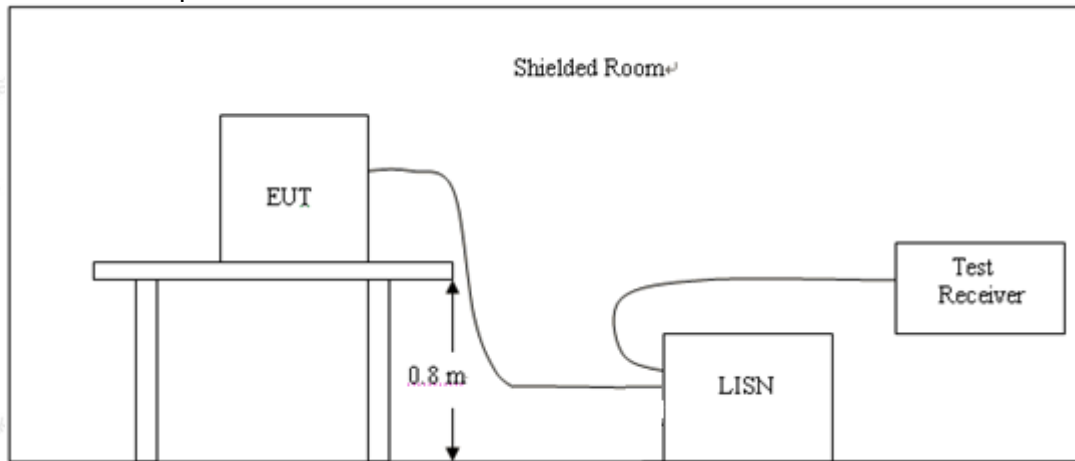


3.3. Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.



3.4. Test Result

Test Specification: Line

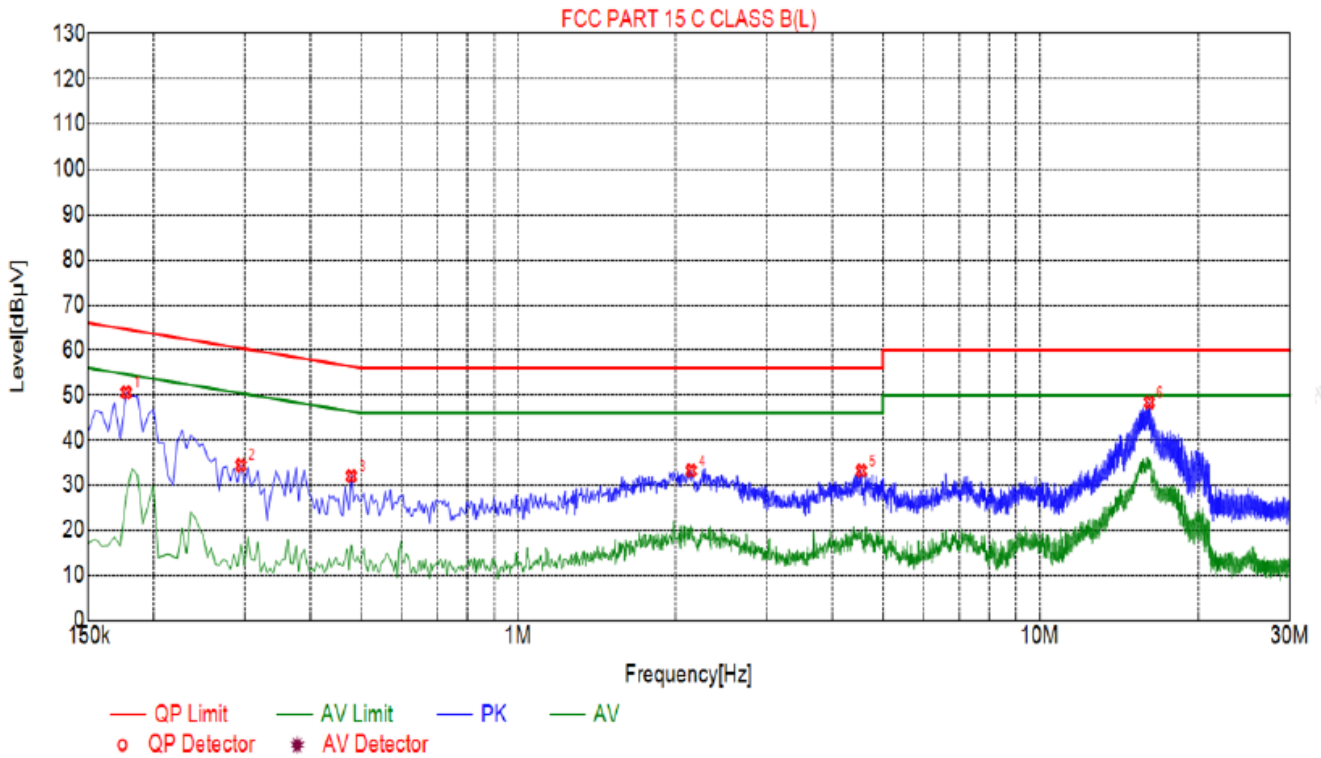

Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.1770	50.58	20.05	64.63	14.05	30.53	PK	L
2	0.2940	34.43	20.03	60.41	25.98	14.40	PK	L
3	0.4785	32.02	20.04	56.37	24.35	11.98	PK	L
4	2.1480	33.24	20.16	56.00	22.76	13.08	PK	L
5	4.5510	33.20	20.25	56.00	22.80	12.95	PK	L
6	16.1250	48.40	19.98	60.00	11.60	28.42	PK	L


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

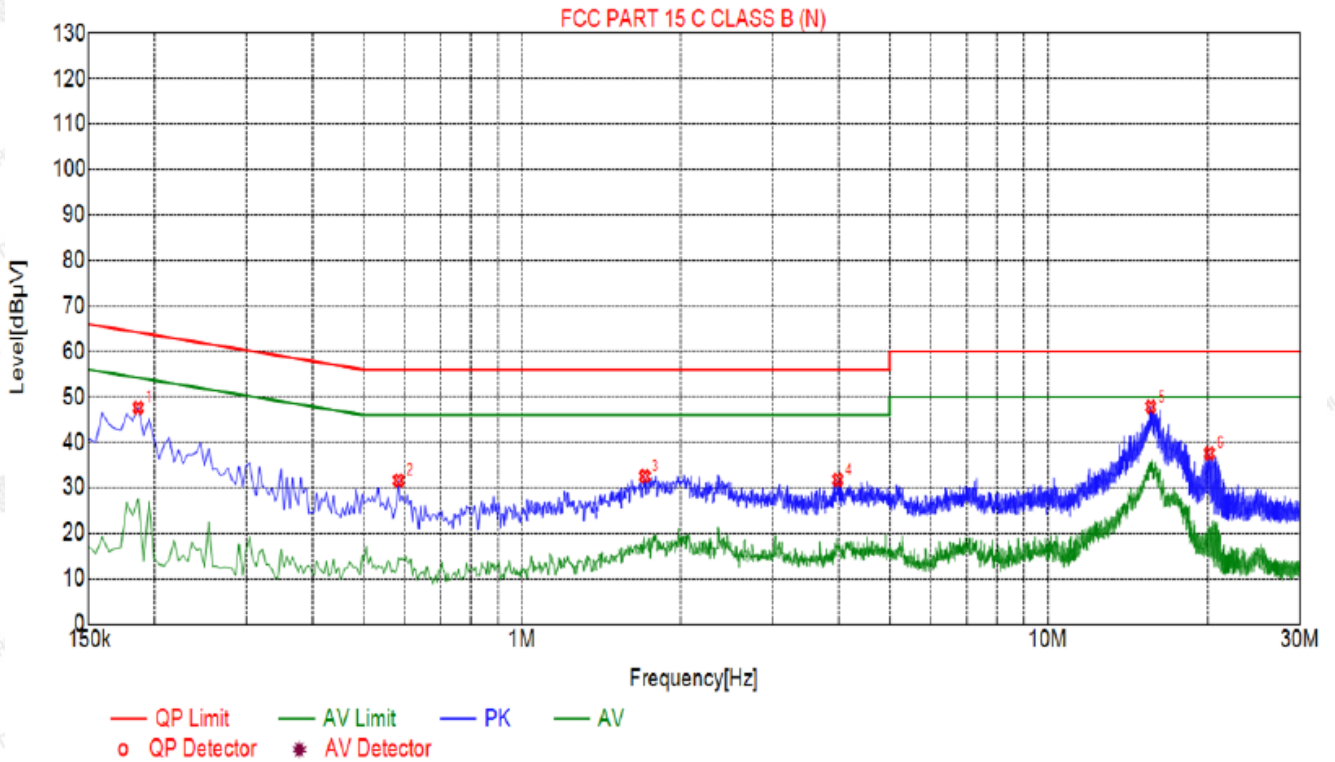

Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.1860	47.63	20.05	64.21	16.58	27.58	PK	N
2	0.5820	31.59	20.05	56.00	24.41	11.54	PK	N
3	1.7115	32.51	20.13	56.00	23.49	12.38	PK	N
4	3.9840	31.75	20.25	56.00	24.25	11.50	PK	N
5	15.6030	47.83	19.97	60.00	12.17	27.86	PK	N
6	20.1660	37.58	20.11	60.00	22.42	17.47	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



4 FIELD STRENGTH OF FUNDAMENTAL

4.1. Limit

FCC§15.249(a);

The field strength of fundamental and harmonic emissions, measured at 3 m, shall not exceed 50 mV/m and 0.5 mV/m respectively.

The field strength limits shall be measured using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using an International Special Committee on Radio Interference (CISPR) quasi-peak detector

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

4.2. Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.



4.3. Test Result

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
902.6	93.47	-4.64	88.83	114	-25.17	peak
902.6	82.05	-4.64	77.41	94	-16.59	AVG
915	93.57	-4.43	89.14	114	-24.86	peak
915	83.15	-4.43	78.72	94	-15.28	AVG
927.4	92.98	-4.25	88.73	114	-25.27	peak
927.4	81.85	-4.25	77.6	94	-16.4	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
902.6	93.23	-4.64	88.59	114	-25.41	peak
902.6	84.22	-4.64	79.58	94	-14.42	AVG
915	93.39	-4.43	88.96	114	-25.04	peak
915	82.16	-4.43	77.73	94	-16.27	AVG
927.4	92.86	-4.25	88.61	114	-25.39	peak
927.4	80.96	-4.25	76.71	94	-17.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

5. RADIATED EMISSION TEST

5.1. Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.490	300	20log 2400/F (kHz)	2400/F (kHz)
0.490-1.705	30	20log 24000/F (kHz)	24000/F (kHz)
1.705-30	30	20log 30	30
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

5.2. Test Setup


(1) Radiated Emission Test-Up Frequency Below 30MHz

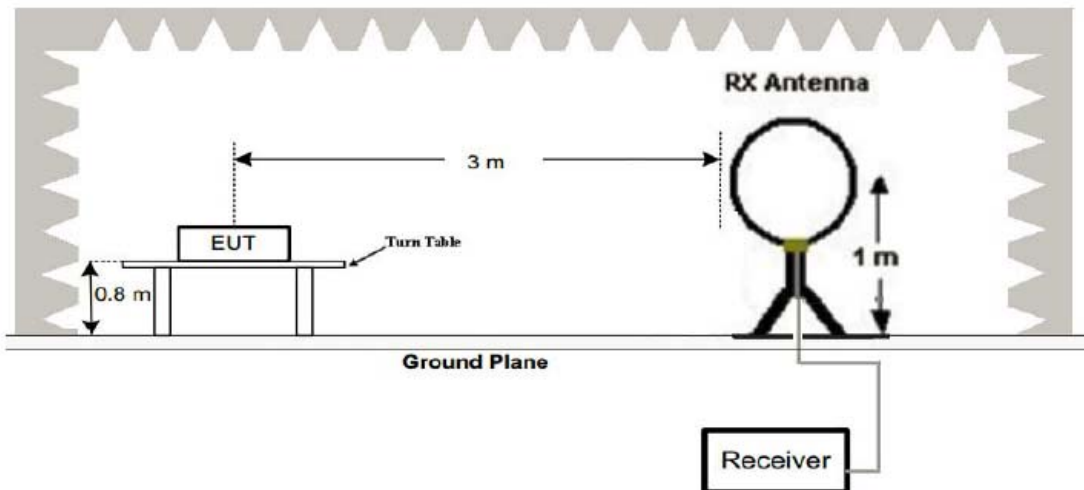

(2) Radiated Emission Test-Up Frequency 30MHz~1GHz

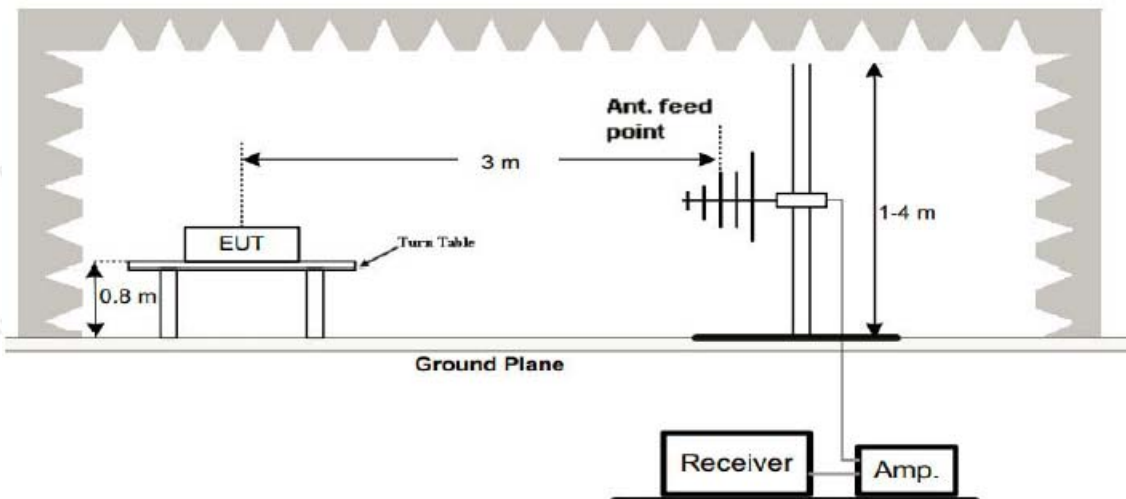

(3) Radiated Emission Test-Up Frequency Above 1GHz

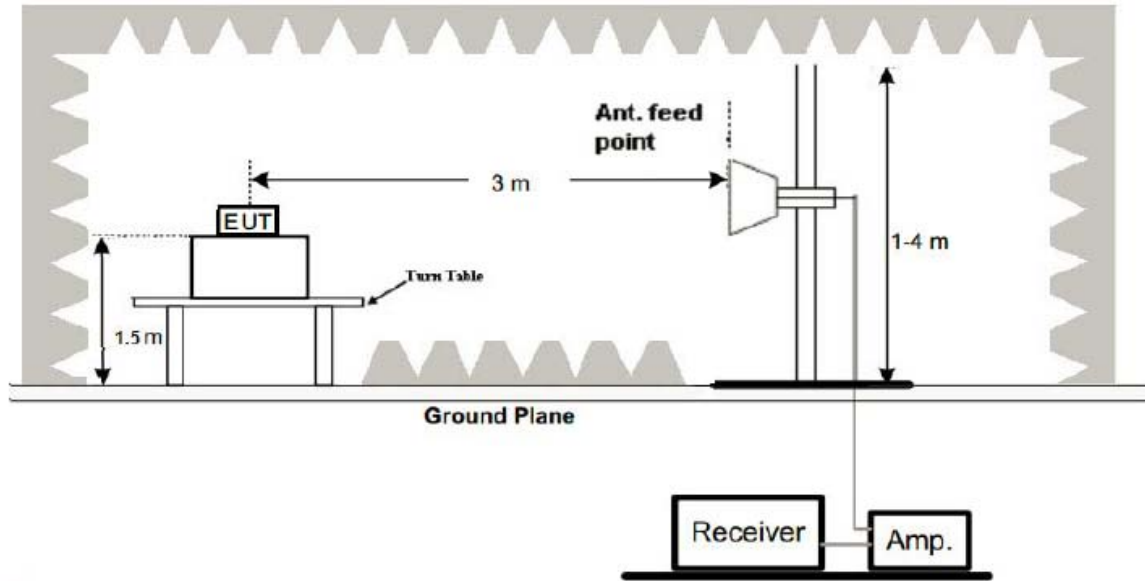

5.3. Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

5.4. Test Result


PASS

All the test modes completed for test. The worst case of Radiated Emission is CH 01; the test data of this mode was reported.



Below 1GHz Test Results:

Antenna polarity: H

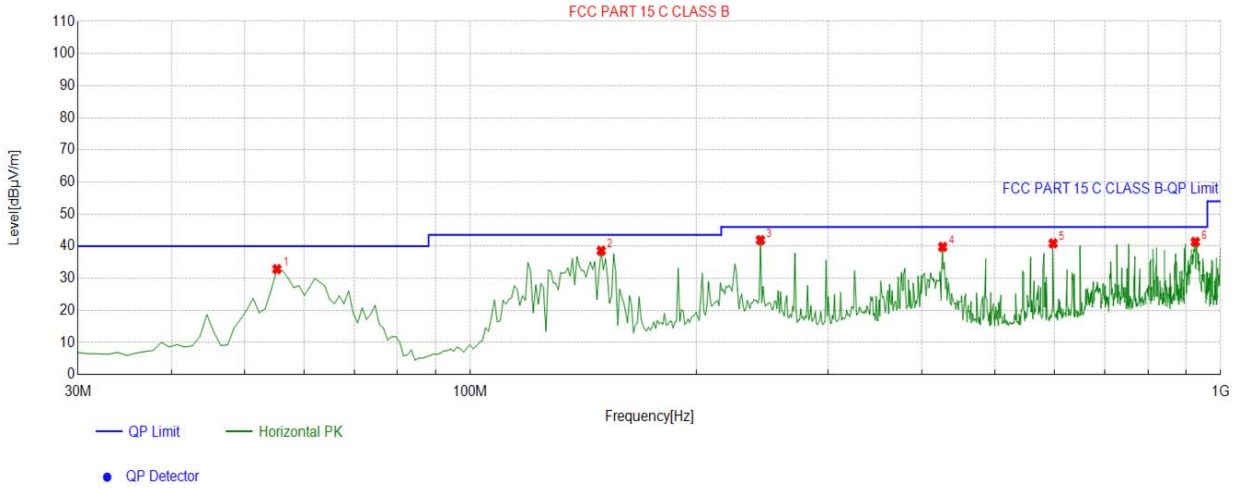


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	55.2452	-14.44	47.28	32.84	40.00	7.16	100	108	Horizontal
2	149.4294	-20.23	58.81	38.58	43.50	4.92	100	12	Horizontal
3	243.6136	-13.69	55.58	41.89	46.00	4.11	100	9	Horizontal
4	426.1562	-9.92	49.69	39.77	46.00	6.23	100	258	Horizontal
5	598.0180	-6.24	47.10	40.86	46.00	5.14	100	1	Horizontal
6	925.2352	-1.82	43.15	41.33	46.00	4.67	100	21	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: V

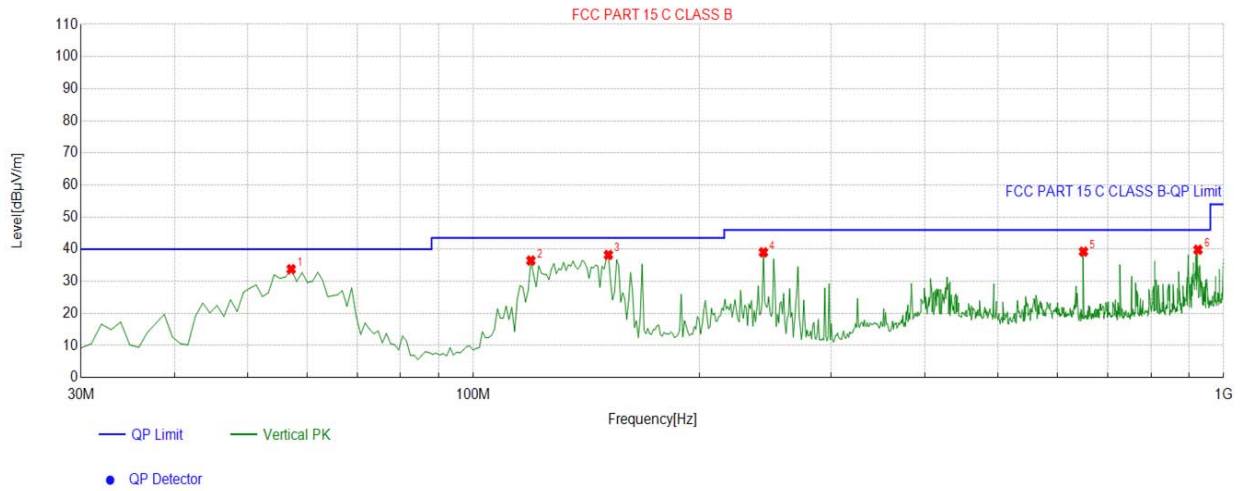

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	57.1872	-14.74	48.50	33.76	40.00	6.24	100	67	Vertical
2	119.3293	-16.99	53.44	36.45	43.50	7.05	100	316	Vertical
3	151.3714	-20.38	58.60	38.22	43.50	5.28	100	0	Vertical
4	243.6136	-13.69	52.71	39.02	46.00	6.98	100	35	Vertical
5	650.4505	-5.79	45.03	39.24	46.00	6.76	100	300	Vertical
6	924.2643	-1.81	41.63	39.82	46.00	6.18	100	185	Vertical

Remark: Factor = Cable loss + Antenna factor – Pre-amplifier; Level = Reading + Factor; Margin = Limit – Level

Harmonics and Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBµV/m)	Limit@3m (dBµV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.



Above 1 GHz Test Results:

CH Low (902.6MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
1805.2	53.47	-3.64	49.83	74	-24.17	peak
1805.2	38.54	-3.64	34.9	54	-19.1	AVG
2707.8	50.85	-0.95	49.9	74	-24.1	peak
2707.8	35.34	-0.95	34.39	54	-19.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
1805.2	48.67	-3.64	45.03	74	-28.97	peak
1805.2	41.18	-3.64	37.54	54	-16.46	AVG
2707.8	50.10	-0.95	49.15	74	-24.85	peak
2707.8	38.82	-0.95	37.87	54	-16.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH Middle (915MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1830	51.29	-3.51	47.78	74	-26.22	peak
1830	41.14	-3.51	37.63	54	-16.37	AVG
2745	51.10	-0.82	50.28	74	-23.72	peak
2745	38.68	-0.82	37.86	54	-16.14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1830	52.04	-3.51	48.53	74	-25.47	peak
1830	40.86	-3.51	37.35	54	-16.65	AVG
2745	52.10	-0.82	51.28	74	-22.72	peak
2745	38.73	-0.82	37.91	54	-16.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH High (927.4MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
1854.8	54.76	-3.43	51.33	74	-22.67	peak
1854.8	43.01	-3.43	39.58	54	-14.42	AVG
2782.2	48.05	-0.75	47.3	74	-26.7	peak
2782.2	42.45	-0.75	41.7	54	-12.3	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
1854.8	56.29	-3.43	52.86	74	-21.14	peak
1854.8	43.01	-3.43	39.58	54	-14.42	AVG
2782.2	54.73	-0.75	53.98	74	-20.02	peak
2782.2	36.78	-0.75	36.03	54	-17.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) “F” denotes fundamental frequency; “H” denotes spurious frequency; “E” denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.



6. BAND EDGE

6.1. Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

6.2. Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.



6.3. Test Result

PASS

Radiated Band Edge Test:

Operation Mode: TX CH Low (902.6MHz)

Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.6	53.12	-5.81	47.31	74	-26.69	peak
902.6	/	-5.81	/	54	/	AVG
927.4	52.59	-5.84	46.75	74	-27.25	peak
927.4	/	-5.84	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.6	56.98	-5.81	51.17	74	-22.83	peak
902.6	/	-5.81	/	54	/	AVG
927.4	55.41	-5.84	49.57	74	-24.43	peak
927.4	/	-5.84	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High (927.4MHz)
Horizontal (Worst case)

Frequency (MHz)	Reading Result (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
902.6	57.41	-5.65	51.76	74	-22.24	peak
902.6	/	-5.65	/	54	/	AVG
927.4	55.26	-5.65	49.61	74	-24.39	peak
927.4	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
902.6	56.98	-5.65	51.33	74	-22.67	peak
902.6	/	-5.65	/	54	/	AVG
927.4	54.01	-5.65	48.36	74	-25.64	peak
927.4	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



7. OCCUPIED BANDWIDTH MEASUREMENT

7.1. Test Setup

Same as Radiated Emission Measurement

7.2. Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW=10KHz. VBW=30KHz, Span=3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

7.3. Measurement Equipment Used

Same as Radiated Emission Measurement

7.4. Test Result

PASS

Frequency	20dB Bandwidth (MHz)	Result
902.6 MHz	0.9164	PASS
915 MHz	0.9324	PASS
927.4 MHz	0.9163	PASS


CH: 902.6MHz




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



CH: 915MHz

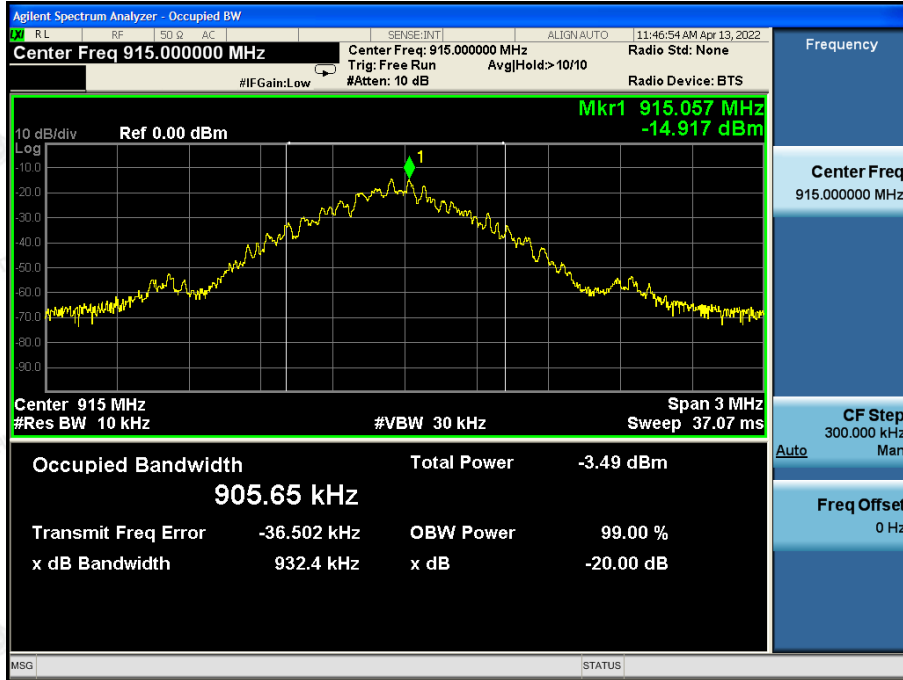

CH: 927.4MHz

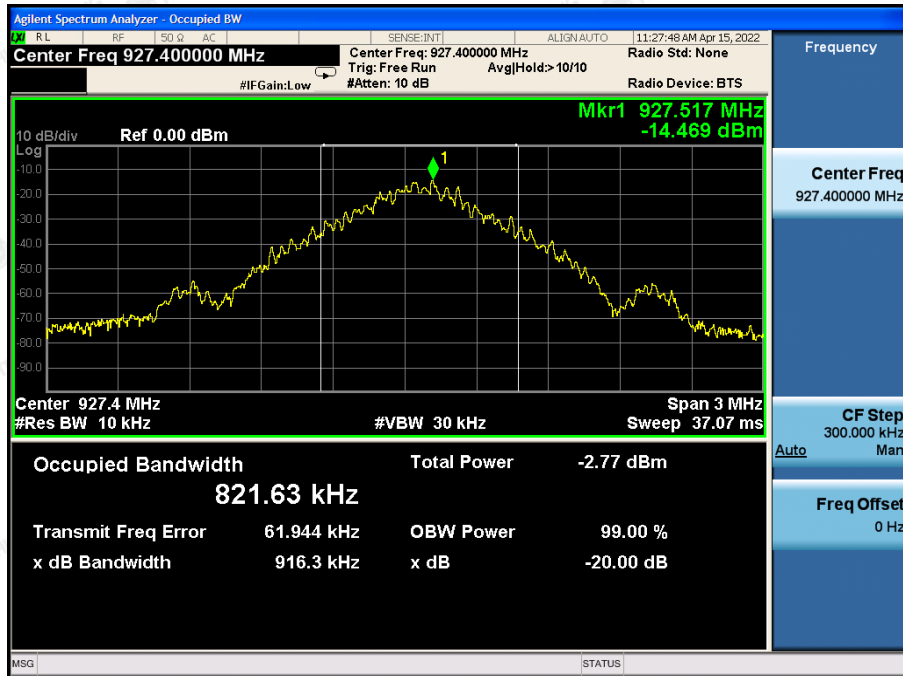

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

8. ANTENNA REQUIREMENT


Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

The antenna used in this product is a Internal Antenna, which permanently attached. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 1.5dBi.



ANTENNA

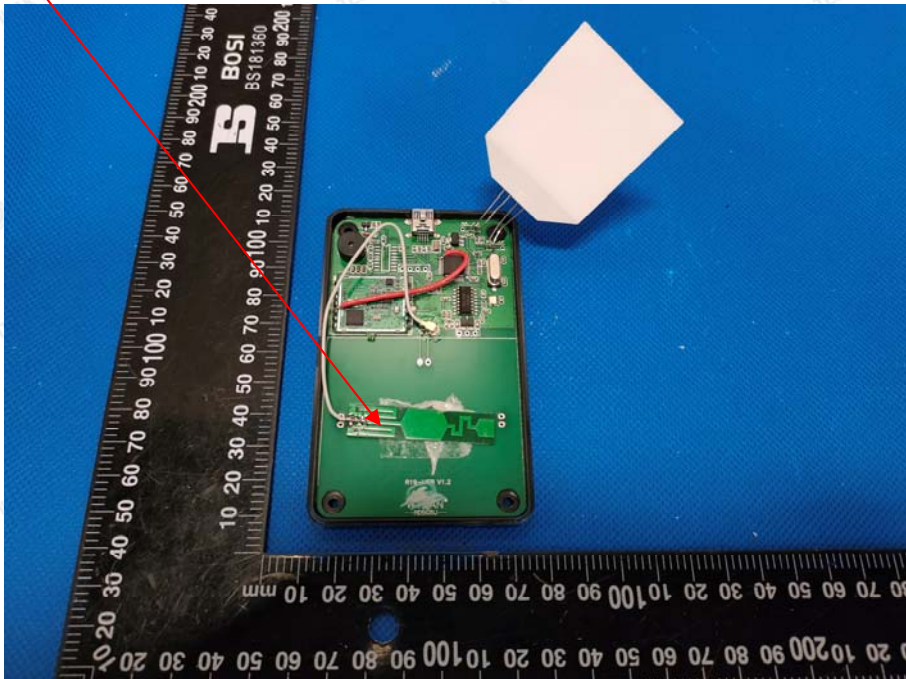



9. PHOTOGRAPH OF TEST

Radiated Emission

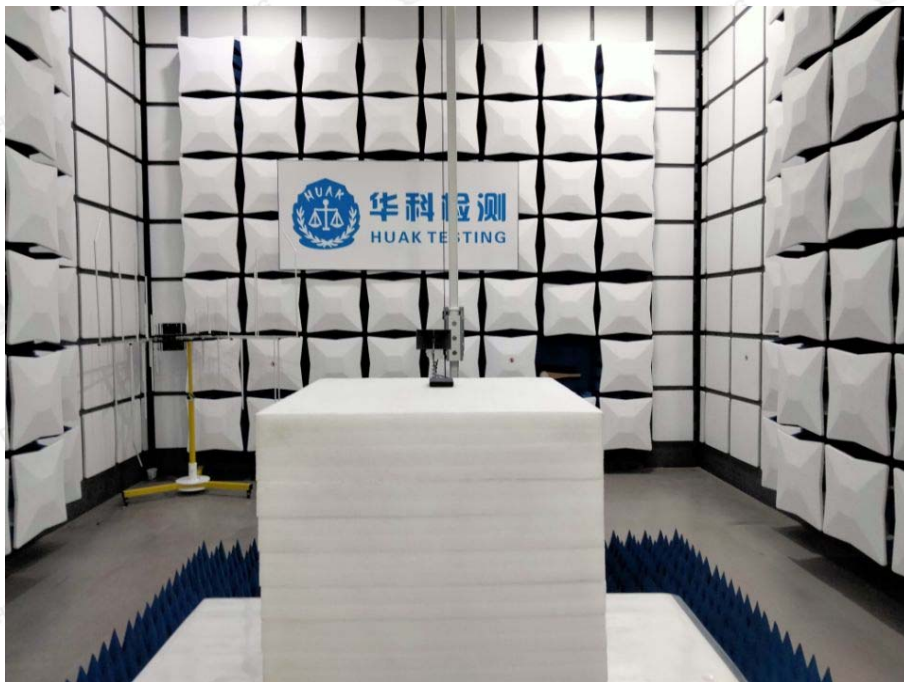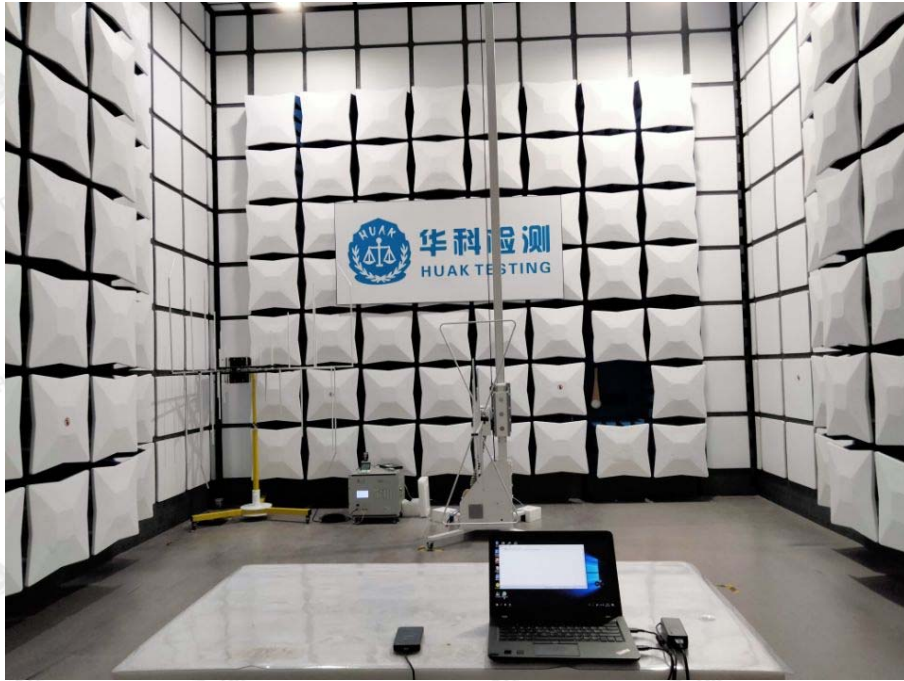

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Addr: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Conducted Emission



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Addr: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



10. PHOTOS OF THE EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----